




**PH-115a**

### Applications

- FOH or Monitor applications for small-scale sound system
- Stage sidefill monitor
- Multifunctional Hall
- Club and Disco

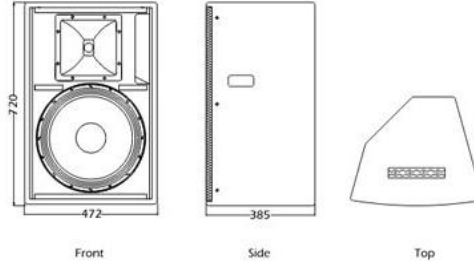

FREQUENCY RESPONSE	60 Hz ~ 22 kHz(±4 dB) / 40 Hz~ 22.5 kHz(-10 dB)
SENSITIVITY (1W/1m)	98 dB( 220 Hz ~ 22 kHz)
NOMINAL IMPEDANCE	8 Ohm
POWER RATING	450 W(AES)
CROSSOVER FREQUENCY	3 kHz
LF COMPONENTS	1 x 15" woofer( 3" voice coil)
HF COMPONENTS	1 x 1" exit compression driver( 2" voice coil)
NOMINAL COVERAGE	80° (H) × 50° (V)
CALCULATED OUTPUT (MAX)	124.5 dB SPL, 130.5 dB SPL peak
DIMENSIONS (H × W × D)	720 × 472 × 385 (mm)
WEIGHTS	27 (kg)
CONNECTORS	2 Neutrik NL4MP connectors
SUSPENSION HARDWARE	Flying tracks (rear,top)

