

WSN041.00

Lavoce

4" WOOFER

NEODYMIUM MAGNET
STEEL BASKET DRIVER



- 1 INCH COPPER VOICE COIL
- 92 dB/SPL SENSITIVITY
- 80 WATT PROGRAM POWER HANDLING
- FEM OPTIMIZED MOTOR AND SUSPENSIONS
- RESONANCE FREE AND HEAVY DUTY BASKET DESIGN
- RUBBER SURROUND MATERIAL

GENERAL SPECIFICATIONS

| | | |
|----------------------------------|---------------------------|-------------------------------------|
| Nominal diameter | mm (in.) | 100 (4) |
| Nominal impedance | Ω | 8 |
| Minimum impedance | Ω | 6,6 |
| Program power (1) | W | 80 |
| AES Power rating (2) | W | 40 |
| Sensitivity (3) | dB | 92 |
| Frequency range | Hz | 100 ÷ 10000 |
| Voice coil diameter | mm (in.) | 25 (1) |
| Chassis material | Steel | |
| Magnet material | Neodymium | |
| Magnet dimensions OD x ID x h | mm (in.) | 65 x 32 x 4 (2.56 x 1.26 x 0.16) |
| Coil material | Copper | |
| Former material | Polyimide | |
| Cone material | Water Proof Treated Paper | |
| Surround material | Rubber | |
| Xmax (4) | mm (in.) | 4 (0.16) |
| Xmech (5) | mm (in.) | 5,8 (0.23) |
| Gap height | mm (in.) | 5 (0.2) |
| Voice coil winding height | mm (in.) | 10,5 (0.41) |
| Driver displacement volume | l (ft ³) | 0,13 (0.004) |


SMALL SIGNAL PARAMETERS

| | | | |
|-----------------------|-------|-------------------------------------|------------|
| DC resistance | Re | Ohm | 5,7 |
| Resonance frequency | Fs | Hz | 100 |
| Moving mass | Mms | g (oz) | 5,3 (0.19) |
| Compliance | Cms | mm/N | 0,40 |
| Force factor | BxL | N/A | 7,9 |
| Mechanical Q-factor | Qms | | 7,0 |
| Electrical Q-factor | Qes | | 0,32 |
| Total Q-factor | Qts | | 0,31 |
| Equivalent air volume | Vas | l (ft ³) | 1,7 |
| Voice coil Inductance | Le | mH | 0,3 |
| Diaphragm area | Sd | cm ² (in. ²) | 54 (8.37) |
| Reference efficiency | Eta 0 | % | 0,6 |


SHIPPING INFORMATION

| | | |
|---------------------|----------|--|
| Net weight | kg (lb.) | 0,5 (1.1) |
| Multipack size (18) | mm (in.) | 385 x 340 x 149 (15.2 x 13.4 x 5.9) |
| Multipack weight | kg (lb.) | 11 (24.3) |

FREQUENCY RESPONSE

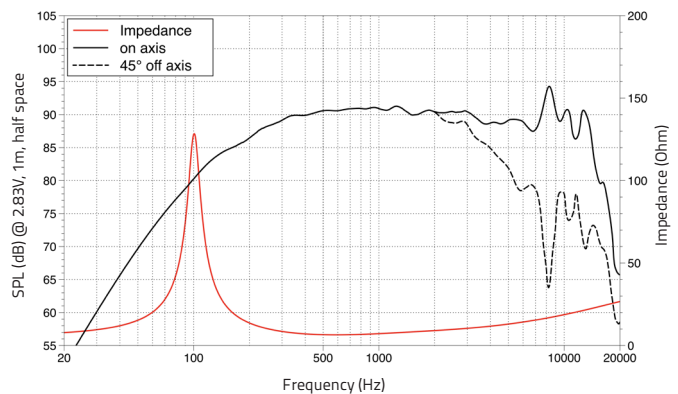

DIMENSIONS mm (in.)

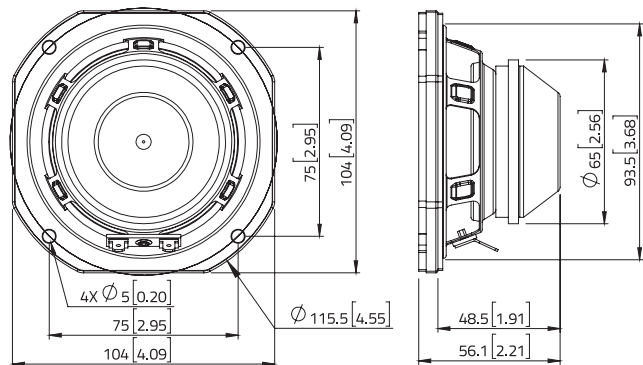

(1) Program power is defined as 3 dB greater than AES Power. (2) Tested for two hours using a continuous, band-limited pink noise signal as per AES 2-1984 Rev. 2003. Loudspeaker tested in free air. (3) From T/S parameters, measured with Klippel DA LPM module. (4) The Xmax is calculated as: $(Hvc - Hg)/2 + Hg/4$. Hvc is the voice coil height and Hg the gap height. (5) The Xmech is calculated as: $(Hvc - Hg)/2 + (Hg - 2)$. Hvc is the voice coil height and Hg the gap height. (6) Thiele-Small parameters are measured after preconditioning: a) at 20°C - 22°C, 50% humidity for 2 hours; b) by Klippel LSI measurement.

All specifications subject to change without notice_B.a

