

WSF101.70G

Lavoce

10" GUITAR WOOFER

FERRITE MAGNET
STEEL BASKET DRIVER



- 1.8 INCH COPPER VOICE COIL
- 98 dB/SPL SENSITIVITY
- 120 WATT PROGRAM POWER HANDLING
- SMOOTH AND SILKY TONE
- CONTROLLED LOW-END, FAT AND WARM MIDS, DETAILED AND HARMONICALLY RICH HIGHS

GENERAL SPECIFICATIONS

| | | |
|-------------------------------|---------------------------|------------------------------------|
| Nominal diameter | mm (in.) | 250 (10) |
| Nominal impedance | Ω | 8 |
| Minimum impedance | Ω | 7,4 |
| Program power (1) | W | 120 |
| AES Power rating (2) | W | 60 |
| Sensitivity (3) | dB | 98 |
| Frequency range | Hz | 100 ÷ 6000 |
| Voice coil diameter | mm (in.) | 45 (1.8) |
| Chassis material | Steel | |
| Magnet material | Ferrite | |
| Magnet dimensions OD x ID x h | mm (in.) | 134 x 60 x 15 (5.28 x 2.36 x 0.59) |
| Coil material | Copper | |
| Former material | Polyimide | |
| Cone material | Water Proof Treated Paper | |
| Surround material | Paper | |
| Xmax (4) | mm (in.) | 2,7 (0.11) |
| Xmech (5) | mm (in.) | 5,2 (0.2) |
| Gap height | mm (in.) | 6 (0.24) |
| Voice coil winding height | mm (in.) | 8,4 (0.33) |
| Driver displacement volume | l (ft ³) | 1,151 (0.041) |


SMALL SIGNAL PARAMETERS

| | | | |
|-----------------------|-------|-------------------------------------|-------------|
| DC resistance | Re | Ohm | 7,5 |
| Resonance frequency | Fs | Hz | 78 |
| Moving mass | Mms | g (oz) | 20,7 (0.73) |
| Compliance | Cms | mm/N | 0,2 |
| Force factor | BxL | N/A | 11,9 |
| Mechanical Q-factor | Qms | | 11,4 |
| Electrical Q-factor | Qes | | 0,53 |
| Total Q-factor | Qts | | 0,50 |
| Equivalent air volume | Vas | l (ft ³) | 36 (1.3) |
| Voice coil Inductance | Le | mH | 0,51 |
| Diaphragm area | Sd | cm ² (in. ²) | 356 (55.18) |
| Reference efficiency | Eta 0 | % | 3,06 |


SHIPPING INFORMATION

| | | |
|--------------------|----------|-----------------------------------|
| Net weight | kg (lb.) | 2,4 (5.3) |
| Multipack size (1) | mm (in.) | 300 x 300 x 126 (18.1 x 18.1 x 5) |
| Multipack weight | kg (lb.) | 3,2 (7) |

FREQUENCY RESPONSE

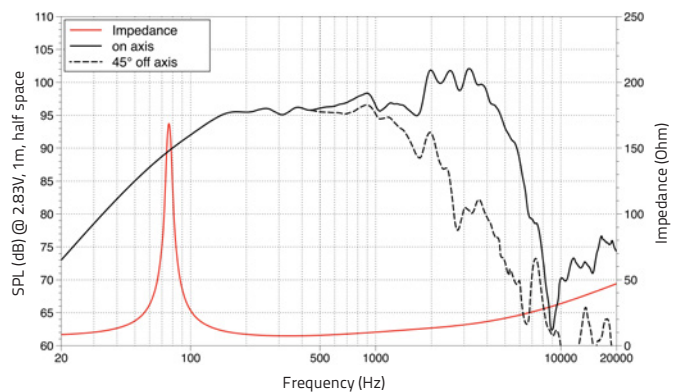

DIMENSIONS mm (in.)

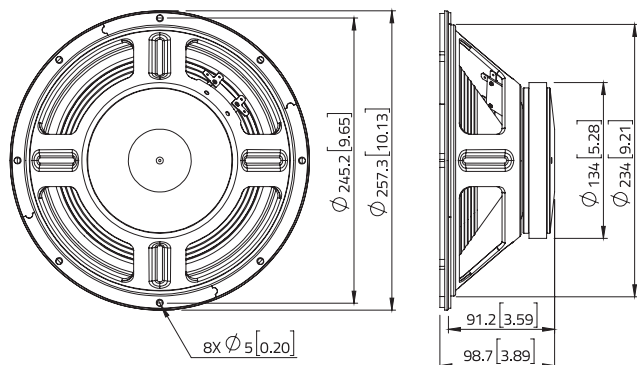

(1) Program power is defined as 3 dB greater than AES Power. (2) Tested for two hours using a continuous, band-limited pink noise signal as per AES 2-1984 Rev. 2003. Loudspeaker tested in free air. (3) From T/S parameters, measured with Klippel DA LPM module. (4) The Xmax is calculated as: $(Hvc - Hg)/2 + Hg/4$. Hvc is the voice coil height and Hg the gap height. (5) The Xmech is calculated as: $(Hvc - Hg)/2 + (Hg - 2)$. Hvc is the voice coil height and Hg the gap height. (6) Thiele-Small parameters are measured after preconditioning: a) at 20°C - 22°C, 50% humidity for 2 hours; b) by Klippel LSI measurement.

All specifications subject to change without notice_C.a

