

DATA SHEET

PUBLIC ADDRESS / AMPLIFIERS / STEREO



WI-FI COMPACT STEREO AMPLIFIER







Great reliability and sound quality.

- Compact size
- Wi-Fi/USB player and auxiliary input
- Multi-room audio
- Easily hidden

+ Info:



FONESTAR

https://fonestar.com/WA-225W

Poligono Trascueto. 39600 Revilla de Camargo. Cantabria (España)



ESPECIALLY RECOMMENDED IN:



DESCRIPTION

Wi-Fi stereo amplifierPlay music from your smartphone, tablet, Windows or Mac, via Wi-Fi (2.4 GHz). It has an App for control from smartphones and tablets (iOS and Android), which allows you to connect to online music services and internet radio, send the same music programme to several amplifiers at the same time (multiroom) or play different music programmes on each amplifier, control the volume of each amplifier, customise its name, among other options. High reliability and sound quality, thanks to high-efficiency Class D amplifier circuitry, plus it also features a USB player and auxiliary input for use as a traditional amplifier. For home and professional audio installations (music bars, waiting rooms, clinics, etc.).



FONESTAR

https://fonestar.com/WA-225W

Poligono Trascueto. 39600 Revilla de Camargo. Cantabria (España)



TECHNICAL CHARACTERISTICS


FEATURES	 Hi-Fi stereo amplifier. Play music from your smartphone, tablet, Windows or Mac (compatible with DLNA and Airplay). App for control from smartphones and tablets (iOS and Android), which allows connection to online music services and internet radio. Multiroom function. 6 customisable preset buttons. USB player and auxiliary input. Steel housing for surface mounting. Stereo speaker output. NOTE: In multiroom mode, one of the receivers is the "master" and stays connected to the router's Wi-Fi network. The "master" creates a Wi-Fi access point to which the "slave" receivers connect, disconnecting from the router's Wi-Fi network. "Slave" receivers must be within range of the "master's" Wi-Fi access point.
POWER	20 + 20 W RMS at 4 Ohm
RESPONSE	20-17,000 Hz -3 dB
DISTORTION	Harmonic: < 0.04% at 1 kHz
INPUTS	1 aux, 3.5 mm jack 7,700 Ohm 1 V 1 RJ-45 Ethernet
OUTPUTS	1 aux line, 2 x RCA Loudspeakers: 4-8 Ohm, screw terminals
CONTROLS	Playback control and 6 customizable preset buttons
S/N RATIO	=< 80 dB
POWER SUPPLY	15 V DC, 3 A with adapter included
DIMENSIONS	227 x 38 x 110 mm depth
WEIGHT	0.8 kg (adapter included)

FONESTAR

+ Info:

https://fonestar.com/WA-225W

Poligono Trascueto. 39600 Revilla de Camargo. Cantabria (España)

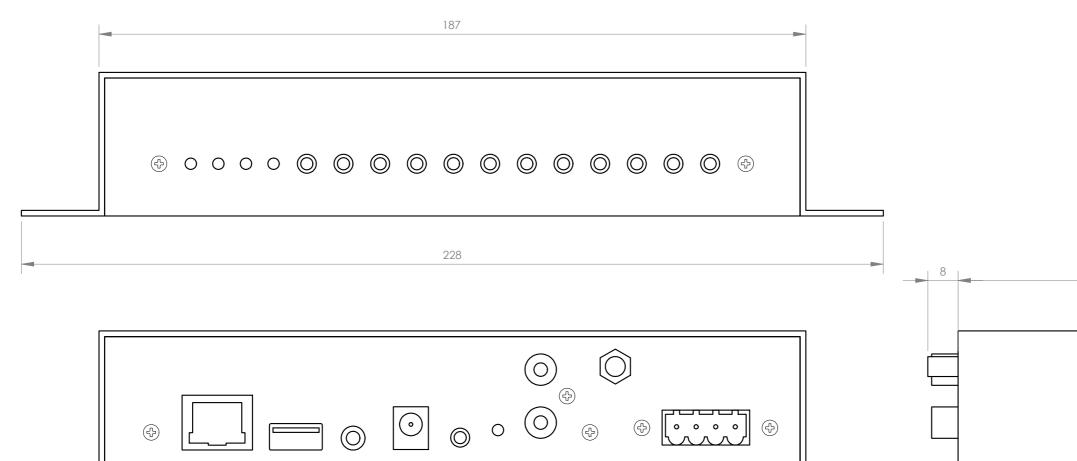

(\mathbf{r})	4	$\left[\begin{array}{c} \\ \end{array} \right]$
		ß



100	
	A
	30

	Units	Scale
DMPACT STEREO AMPLIFIER	mm	1:1